

SPECIFICATIONS

High Voltage LED Series
Chip on Board

C-Series Gen.2
(Small LES COB line-up)



High efficacy COB LED package
Well-suited for use in spotlight applications



Features & Benefits

- Chip on Board (COB) solution makes it easy to design in
- Simple assembly reduces manufacturing cost
- Low thermal resistance
- InGan/Gan MQW LED with long time reliability

Applications

- Spotlingt / Downlight
- LED Retrofit Bulbs
- Outdoor Illumination

Dongbu LED Co., Ltd.

53-24 , Dongtansandan 6-gil , Hwaseong-si , Gyeonggi-do , Republic of Korea 18487

Tel. : +82 - 70 - 8874 - 9943 Fax. : +82 - 31 - 373 - 7626

[http : //www.dongbuled-s.com](http://www.dongbuled-s.com)

Table of Contents

1.	Characteristics		3
2.	Product Code Information		6
3.	Typical Characteristics Graphs		10
4.	Outline Drawing & Dimension		13
5.	Label Structure		17
6.	Packing Structure		18
7.	Precautions in Handling & Use		21

1. Characteristics

1) Absolute Maximum Rating

Item	Symbol	Model	Rating	Unit	Condition
Ambient / Operating Temperature	T_a	All	-40 ~ +105	°C	-
Storage Temperature	T_{stg}	All	-40 ~ +120	°C	-
LED Junction Temperature	T_J	All	140	°C	-
Case Temperature	T_c	All	105	°C	-
Forward Current	I_F	LC010C	380	mA	-
		LC020C	920		-
		LC030C	1380		-
		LC040C	1610		-
Power Dissipation	P_D	LC010C	13.8	W	-
		LC020C	34.0		-
		LC030C	51.1		-
		LC040C	59.5		-
ESD (HBM)	-		±2	kV	-

2) Electro-optical Characteristics (I_F = Sorting Current, T_J = 85°C)

Item	Unit	Rank	Min.	Typ.	Max.
Forward Voltage (V_F)	V	YZ	32	35.0	38.0
Color Rendering Index (Ra)	-	5	80		
		7	90		
Thermal Resistance (junction to case point)	°C/W	LC010C	-	1.5	-
		LC020C	-	0.9	-
		LC030C	-	0.6	-
		LC040C	-	0.5	-
Beam Angle	°			115	
Nominal Power / Sorting Current	W / mA	LC010C	-	10.5 / 300	-
		LC020C	-	21.0 / 600	-
		LC030C	-	31.5 / 900	-
		LC040C	-	36.8 / 1050	-

Notes :

- 1) The COB is tested in pulsed condition at rated test current (10 ms pulse width) and rated temperature ($T_J = T_C = T_a = 85^\circ\text{C}$)
- 2) Dongbu LED maintains measurement tolerance of : forward voltage = $\pm 5\%$ %, CRI = ± 1
- 3) Refer to the derating curve, ' 3. Typical Characteristics Graph designed within the range.

3) Luminous Flux Characteristics (I_F = Sorting Current)

Model	CRI (Ra) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C		
				Min.	Typ.	Max.
LC010C	80	2700	C2	1151	1212	-
		3000	C2	1210	1274	-
		3500	C2	1245	1311	-
		4000	C2	1270	1337	-
		5000	C2	1281	1348	-
LC020C	80	2700	C2	2361	2485	-
		3000	C2	2494	2625	-
		3500	C2	2554	2688	-
		4000	C2	2605	2742	-
		5000	C2	2627	3765	-
LC030C	80	2700	C2	3576	3956	-
		3000	C2	3758	4072	-
		3500	C2	3868	4154	-
		4000	C2	3946	4188	-
		5000	C2	3979	2765	-
LC040C	80	2700	C2	4090	4305	-
		3000	C2	4298	4524	-
		3500	C2	4424	4657	-
		4000	C2	4513	4750	-
		5000	C2	4550	4790	-

3) Luminous Flux Characteristics (I_F = Sorting Current)

Model	CRI (Ra) Min.	Nominal CCT (K)	Flux Rank	Flux@ $T_J = 85^\circ\text{C}$		
				Min.	Typ.	Max.
LC010C	90	2700	C2	985	1037	-
		3000	C2	1036	1091	-
		3500	C2	1067	1123	-
		4000	C2	1089	1147	-
		5000	C2	1099	1156	-
LC020C	90	2700	C2	2021	2127	-
		3000	C2	2125	2237	-
		3500	C2	2189	2304	-
		4000	C2	2234	2351	-
		5000	C2	2253	2372	-
LC030C	90	2700	C2	3061	3222	-
		3000	C2	3219	3389	-
		3500	C2	3315	3490	-
		4000	C2	3384	3562	-
		5000	C2	3413	3592	-
LC040C	90	2700	C2	3500	3684	-
		3000	C2	3682	3875	-
		3500	C2	3791	3991	-
		4000	C2	3869	4073	-
		5000	C2	3903	4108	-

Notes :

- 1) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature ($T_J = T_C = 85^\circ\text{C}$)
- 2) DongbuLED maintains measurement tolerance of: Luminous flux = $\pm 7\%$, CRI = ± 1

2. Product Code Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
S	P	H	W	H	A	H	D	N	C	2	5	Y	Z	W	3	C	2

Digit	PKG informaiont	Code	Specification
1 2 3	Donblu Package High Power	SPH	
4 5	Color	WH	White
6	Product Version	A	
7 8	Form Factor	HD	COB
9	Lens Type	N	No Lens
10	Wattage or Model	C F H K	LC010C LC020C LC030C LC040C
11	Internal Code	2	
12	CRI & Sorting Temperature	5 7	Min 80 (85℃) Min 90 (85℃)
13 14	Forward Voltage (V)	YZ	32.0 ~ 38.0
15	CCT (K)	W V U T R	2700K 3000K 3500K 4000K 5000K
16	MacAdam Setp	3	MacAdam 3 - Step
17 18	Luminous Flux (Lm)	C2	COB C-serise Gen.2



1) Binning Structure (I_F = Sorting Current, $T_J=85^\circ\text{C}$)

Model	CRI (Ra) Min	Nominal CCT(K)	Product Code	VF Rank	Color Rank	Flux Rank	Flux Range (Φ_v , lm)
LC010C	80	2700	SPHWAHDNC25YZW3C2	YZ	W3	C2	1151~
		3000	SPHWAHDNC25YZV3C2		V3		1210~
		3500	SPHWAHDNC25YZU3C2		U3		1245~
		4000	SPHWAHDNC25YZT3C2		T3		1270~
		5000	SPHWAHDNC25YZR3C2		R3		1281~
LC020C	80	2700	SPHWAHDNF25YZW3C2	YZ	W3	C2	2361~
		3000	SPHWAHDNF25YZV3C2		V3		2494~
		3500	SPHWAHDNF25YZU3C2		U3		2554~
		4000	SPHWAHDNF25YZT3C2		T3		2605~
		5000	SPHWAHDNF25YZR3C2		R3		2627~
LC030C	80	2700	SPHWAHDNH25YZW3C2	YZ	W3	C2	3576~
		3000	SPHWAHDNH25YZV3C2		V3		3758~
		3500	SPHWAHDNH25YZU3C2		U3		3868~
		4000	SPHWAHDNH25YZT3C2		T3		3946~
		5000	SPHWAHDNH25YZR3C2		R3		3979~
LC040C	80	2700	SPHWAHDNK25YZW3C2	YZ	W3	C2	4090~
		3000	SPHWAHDNK25YZV3C2		V3		4298~
		3500	SPHWAHDNK25YZU3C2		U3		4424~
		4000	SPHWAHDNK25YZT3C2		T3		4513~
		5000	SPHWAHDNK25YZR3C2		R3		4550~

1) Binning Structure (I_F = Sorting Current, $T_J=85^\circ\text{C}$)

Model	CRI (Ra) Min	Nominal CCT(K)	Product Code	VF Rank	Color Rank	Flux Rank	Flux Range (Φ_v , lm)
LC010C	90	2700	SPHWAHDNC27YZW3C2	YZ	W3	C2	985~
		3000	SPHWAHDNC27YZV3C2		V3		1036~
		3500	SPHWAHDNC27YZU3C2		U3		1067~
		4000	SPHWAHDNC27YZT3C2		T3		1089~
		5000	SPHWAHDNC27YZR3C2		R3		1099~
LC020C	90	2700	SPHWAHDNF27YZW3C2	YZ	W3	C2	2021~
		3000	SPHWAHDNF27YZV3C2		V3		2125~
		3500	SPHWAHDNF27YZU3C2		U3		2189~
		4000	SPHWAHDNF27YZT3C2		T3		2234~
		5000	SPHWAHDNF27YZR3C2		R3		2253~
LC030C	90	2700	SPHWAHDNH27YZW3C2	YZ	W3	C2	3061~
		3000	SPHWAHDNH27YZV3C2		V3		3219~
		3500	SPHWAHDNH27YZU3C2		U3		3315~
		4000	SPHWAHDNH27YZT3C2		T3		3384~
		5000	SPHWAHDNH27YZR3C2		R3		3413~
LC040C	90	2700	SPHWAHDNK27YZW3C2	YZ	W3	C2	3500~
		3000	SPHWAHDNK27YZV3C2		V3		3682~
		3500	SPHWAHDNK27YZU3C2		U3		3791~
		4000	SPHWAHDNK27YZT3C2		T3		3869~
		5000	SPHWAHDNK27YZR3C2		R3		3903~

2) Chromaticity Region & Coordinates (I_F = Sorting Current, T_J = 85 °C)

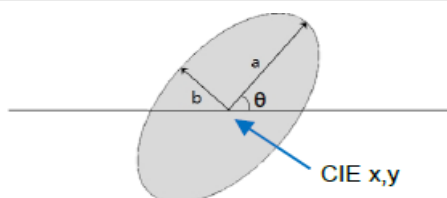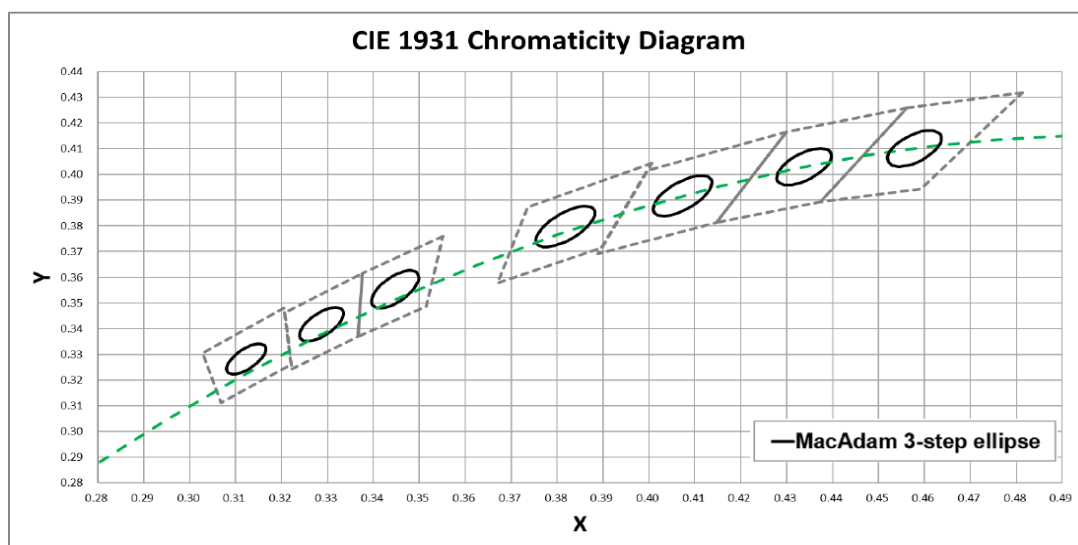

MacAdam Ellipse (W2, W3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.4578	0.4101	53.70	0.0081	0.0042

MacAdam Ellipse (V2, V3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.4338	0.4030	53.22	0.0083	0.0041

MacAdam Ellipse (U2, U3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.4073	0.3917	54.00	0.0093	0.0041

MacAdam Ellipse (T2, T3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3818	0.3797	53.72	0.0094	0.0040

MacAdam Ellipse (R3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3447	0.3553	59.62	0.0082	0.0035

MacAdam Ellipse (Q3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3287	0.3417	59.10	0.0075	0.0032

MacAdam Ellipse (P3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3123	0.3282	58.57	0.0067	0.0029


Notes :

Dongbuled maintains measurement tolerance of: $C_x, C_y = \pm 0.005$


3. Typical Characteristics Graphs

1) Spectrum Distribution (I_F = Sorting Current, $T_J = 25^\circ\text{C}$)



- CRI 80+

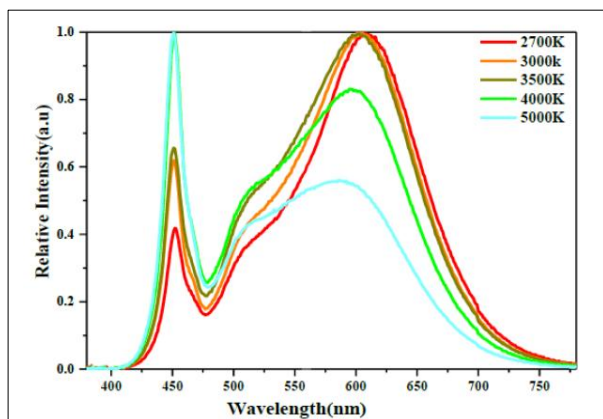



- CRI 90+

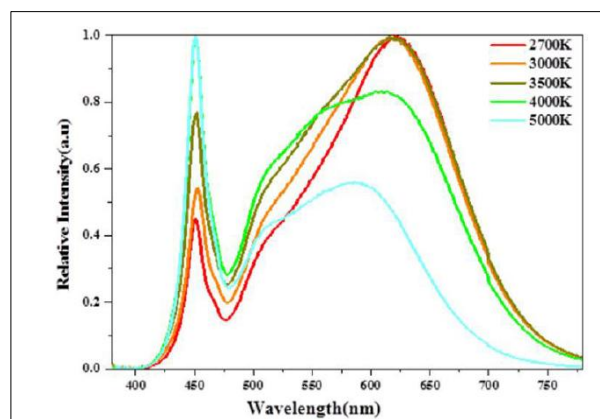



2) Forward Current Characteristics ($T_c = 85^\circ\text{C}$)

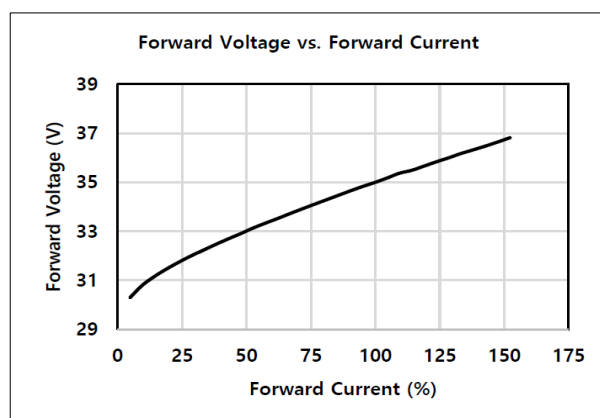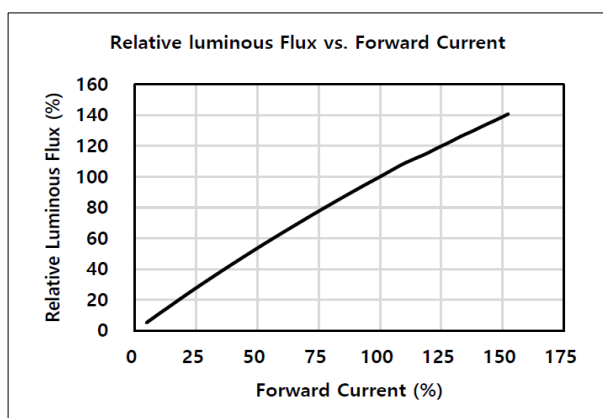


3) Temperature Characteristics (I_F = Sorting Current)

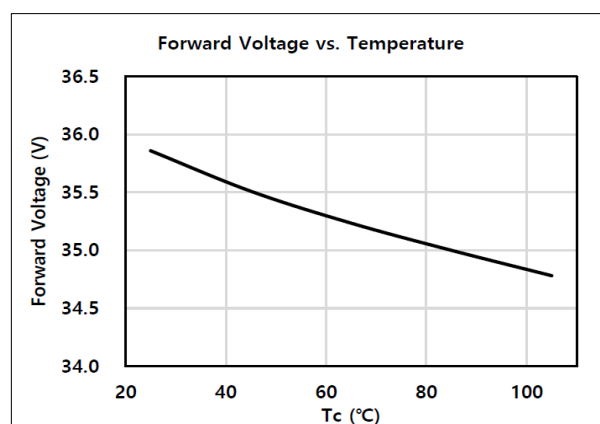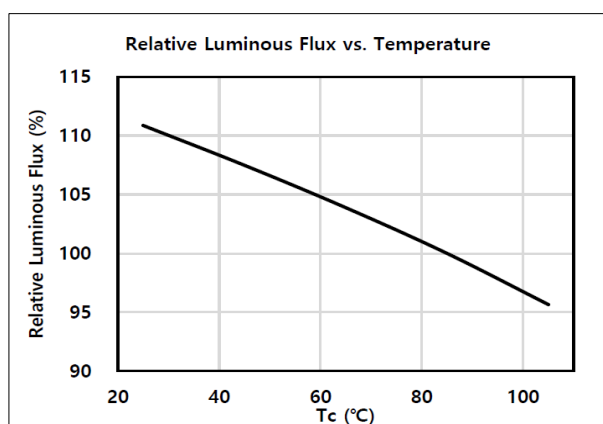

4) Color Shift Characteristics ($T_c = 25^\circ\text{C}$, $I_F = \text{Sorting Current}$, $\text{CRI} = 80+$)

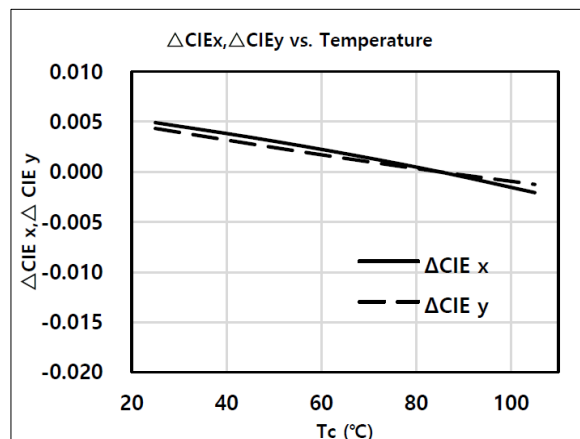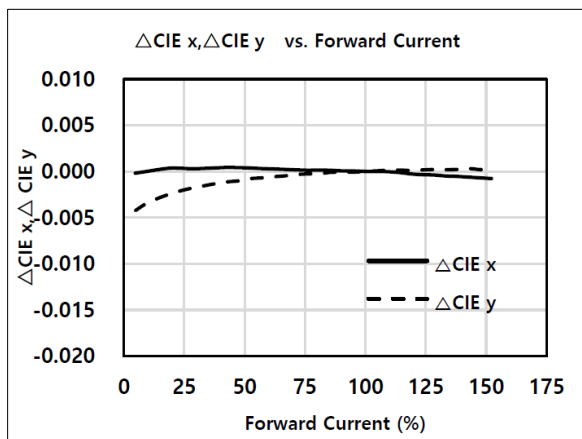


5) Beam Angle Characteristics ($I_F = \text{Sorting Current}$, $T_c = 25^\circ\text{C}$)

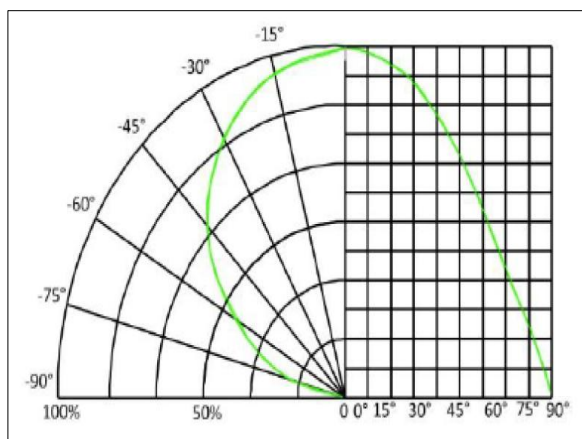


6) Derating Characteristics


- LC010C

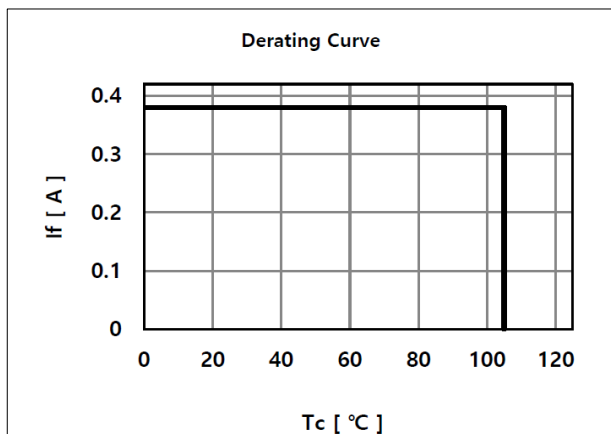


- LC020C

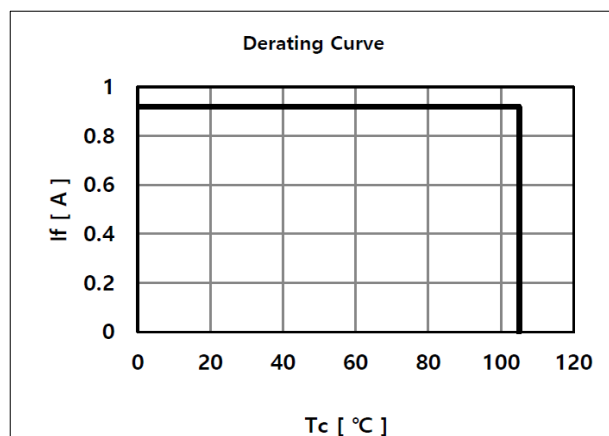

- LC030C

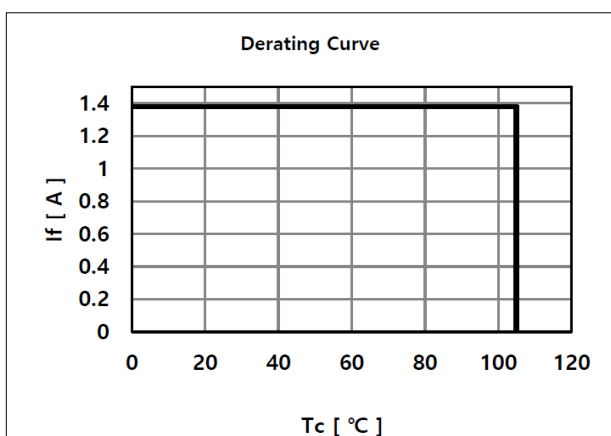


- LC040C

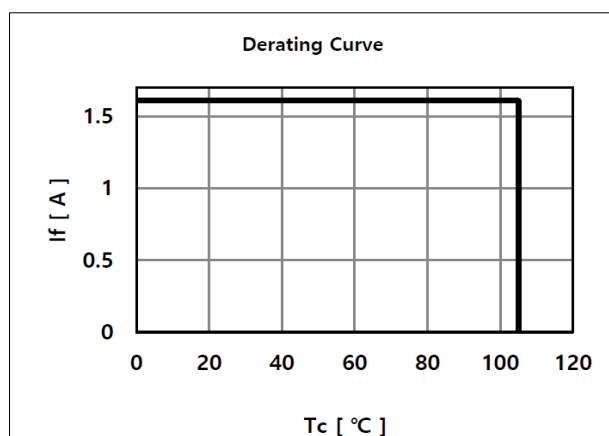

4. Outline Drawing & Dimension

1) LC010C

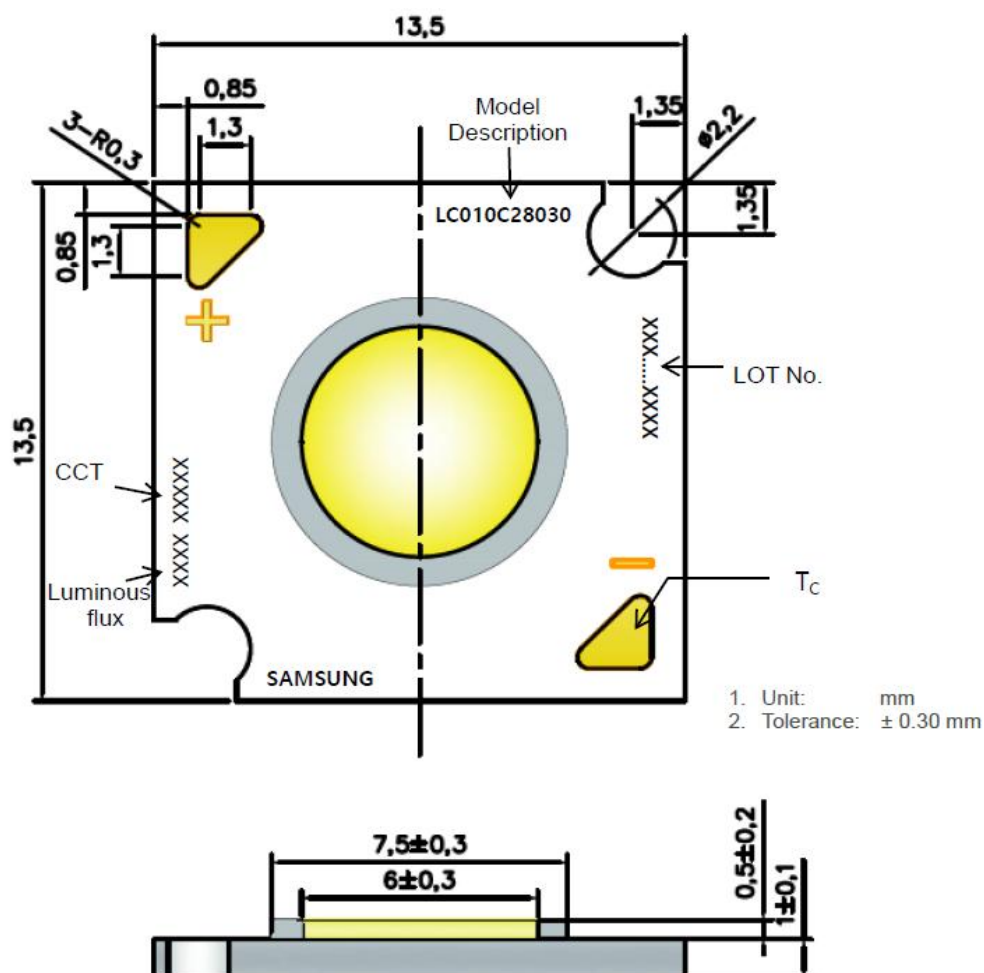


Item	Dimension	Tolerance	Unit
Length	13.5	±0.15	mm
Width	13.5	±0.15	mm
Height	Dam	0.5	±0.20 mm
	Substrate	1.0	±0.10 mm
LED Diameter	Light Emitting Surface	6.0	±0.30 mm

Notes :

Denoted product information above is only an example

(LC010C2 8030 : LC010C, Gen2, CRI80+, 3000K)

2) LC020C

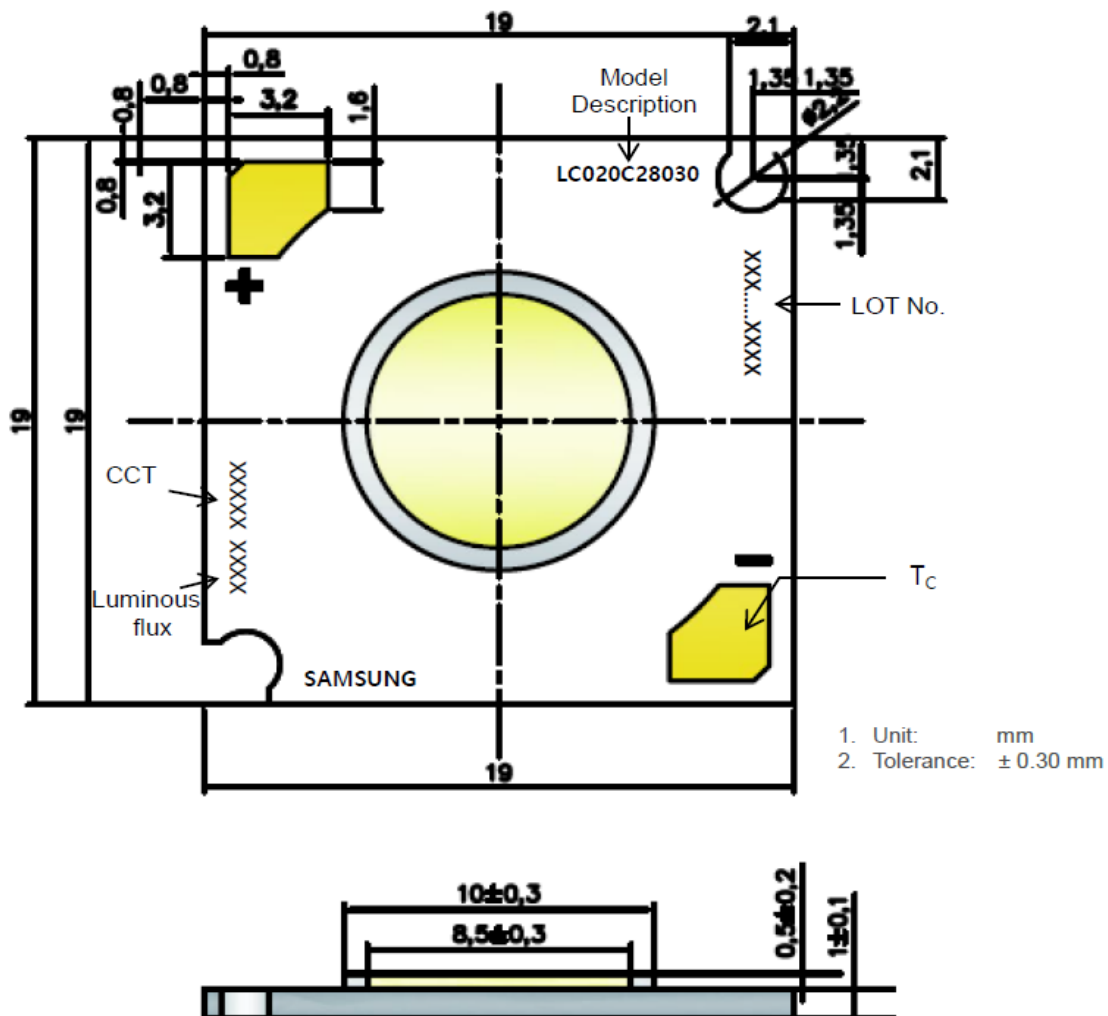


Item	Dimension	Tolerance	Unit
Length	19.0	± 0.15	mm
Width	19.0	± 0.15	mm
Height	Dam	0.5	± 0.20 mm
	Substrate	1.0	± 0.10 mm
LED Diameter	Light Emitting Surface	8.0	± 0.30 mm

Notes :

Denoted product information above is only an example
(LC020C2 8030 : LC020C, Gen2, CRI80+, 3000K)

3) LC030C

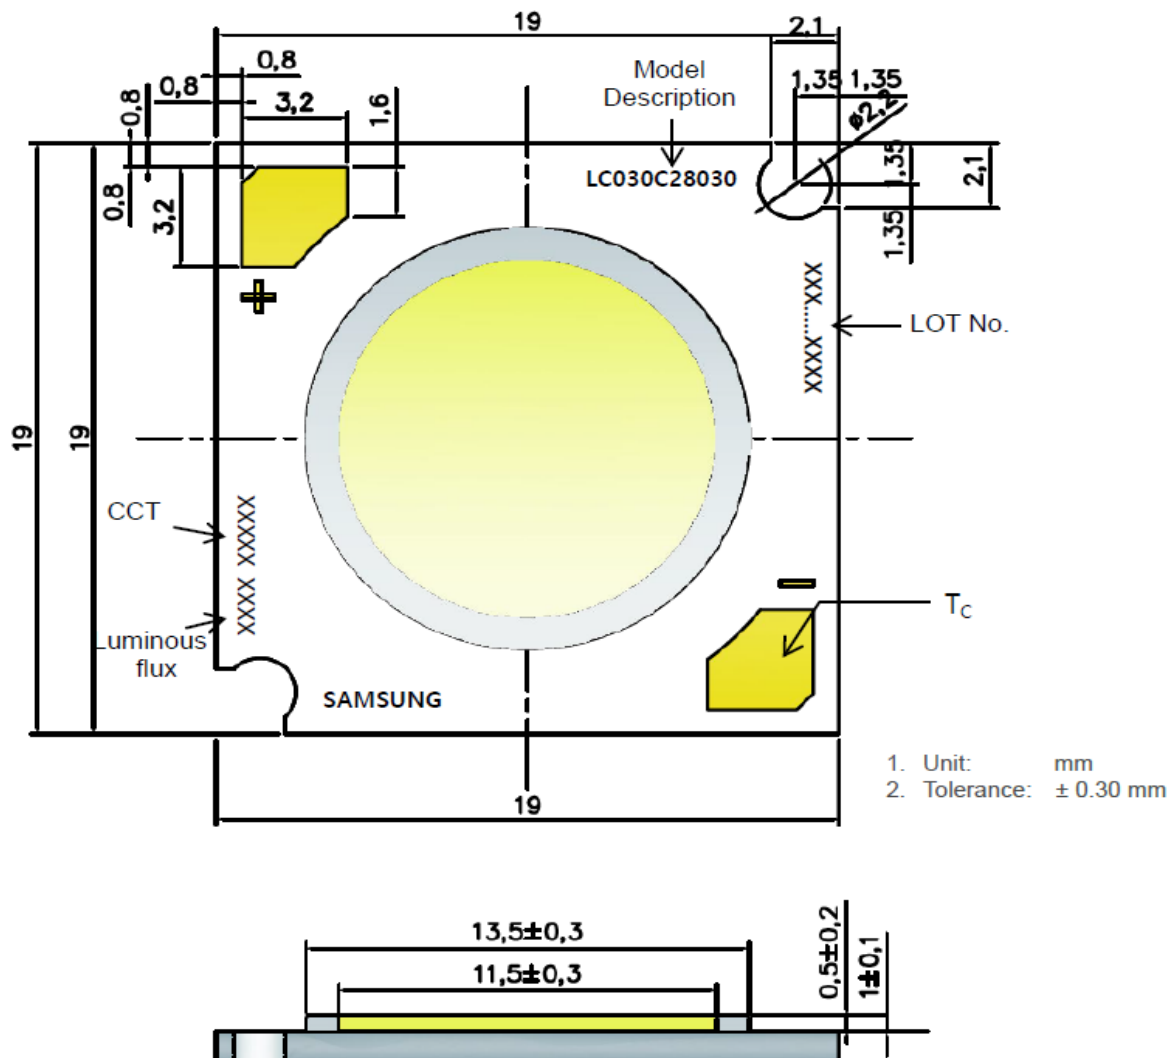


Item	Dimension	Tolerance	Unit
Length	19.0	±0.15	mm
Width	19.0	±0.15	mm
Height	Dam	0.5	±0.20 mm
	Substrate	1.0	±0.10 mm
LED Diameter	Light Emitting Surface	11.5	±0.30 mm

Notes :

Denoted product information above is only an example
(LC030C2 8030 : LC030C, Gen2, CRI80+, 3000K)

4) LC040C

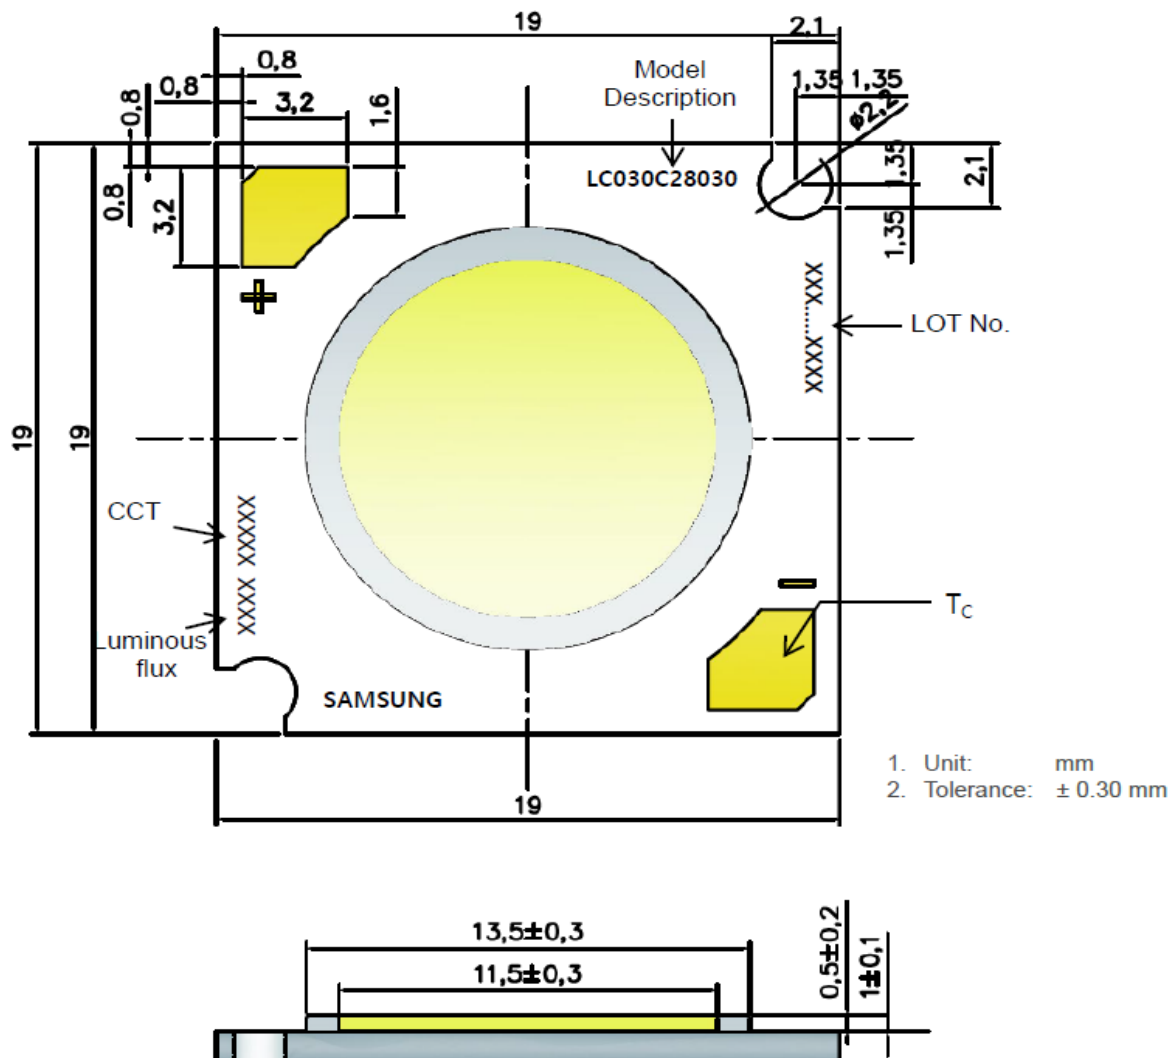

Item	Dimension	Tolerance	Unit
Length	19.0	± 0.15	mm
Width	19.0	± 0.15	mm
Height	Dam	0.5	± 0.20 mm
	Substrate	1.0	± 0.10 mm
LED Diameter	Light Emitting Surface	11.5	± 0.30 mm


Notes :

Denoted product information above is only an example

(LC040C2 8030 : LC040C, Gen2, CRI80+, 3000K)

5. Label Structure

1) Label

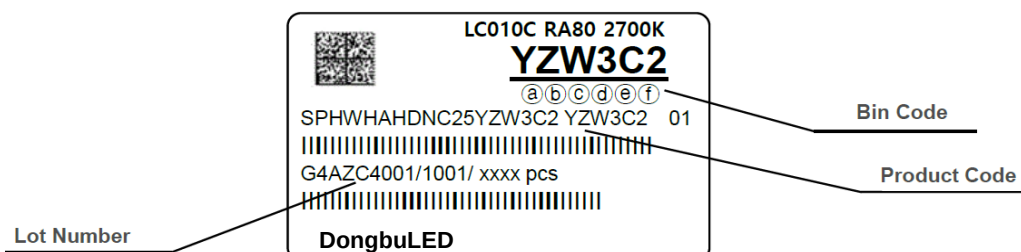


Note : Denoted ncode and product code above is only an example (see description on page5)

Bin Code

- ⒶⒷ : Forward Voltage bin (refer to page 11)
- ⒸⒹ : Chromaticity bin (refer to page 9-10)
- ⒺⒻ : Luminous Flux bin (refer to page 6)

2) Lot Nember

The lot number is composed of the following characters:

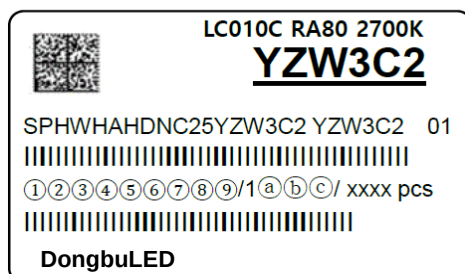

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ / 1 Ⓐ Ⓑ Ⓒ / x xxx pcs

- ① : Production site (S: Giheung, Korea, G: Tianjin, China)
- ② : 4 (LED)
- ③ : Product state (A: Normal, B: Bulk, C: First Production, R: Reproduction, S: Sample)
- ④ : Year (F : 2021 , G : 2022, H : 2023.....)
- ⑤ : Month (1~9, A, B, C)
- ⑥ ⑦ ⑧ ⑨ : Day (1~9, A, V)
- Ⓐ Ⓑ Ⓒ : Product serial number (001 ~ 999)

6. Packing Structure

1) Packing Component

- Model : LC010C


Packing Material	Max. quantity In pcs fo COM	Length	Dimension (mm)			Tolerance
			Width	Height		
Tray	50	200	200	8		1
Anti-Static Bag	250 (5 trays)	320	270	-		± 0.5
Outer Box (small)	500 (2 bags)	225	225	65		5
Outer Box (Middle)	1,000 (4 bags)	225	225	130		5

- Model : LC020C / LC030C / LC040C


Packing Material	Max. quantity In pcs fo COM	Length	Dimension (mm)			Tolerance
			Width	Height		
Tray	25	200	200	8		1
Anti-Static Bag	125 (5 trays)	320	270	-		± 0.5
Outer Box (small)	250 (2 bags)	225	225	65		5
Outer Box (Middle)	500 (4 bags)	225	225	130		5

2) Packing Structure


- Model : LC010C

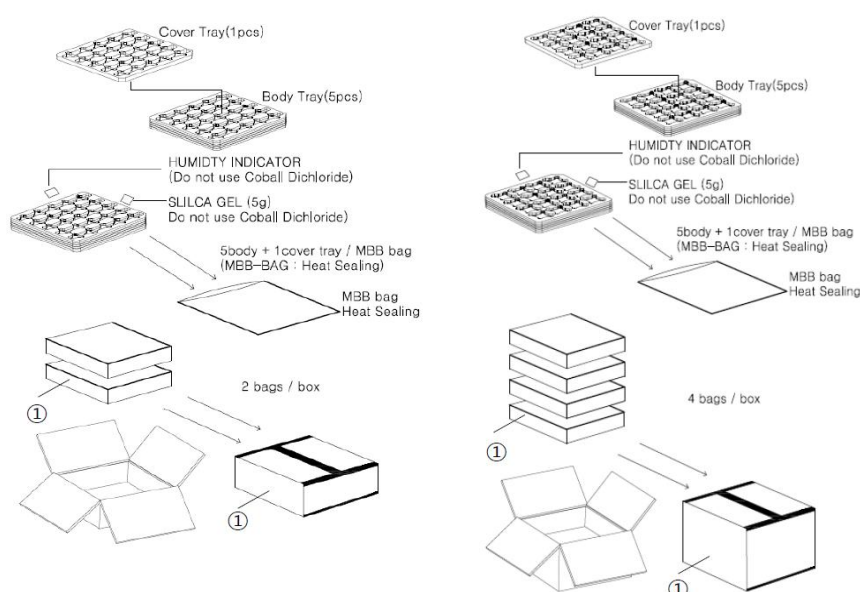

- Model : LC020C / LC030C / LC040C

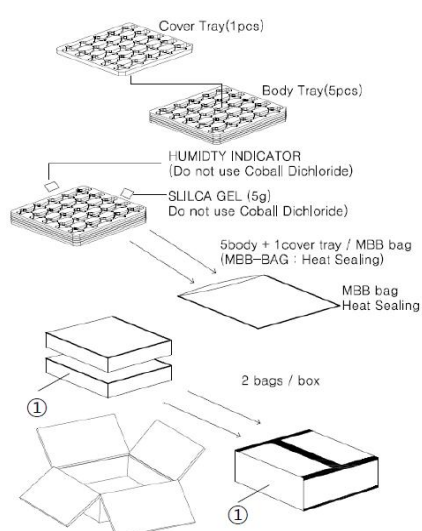

■ Small Box

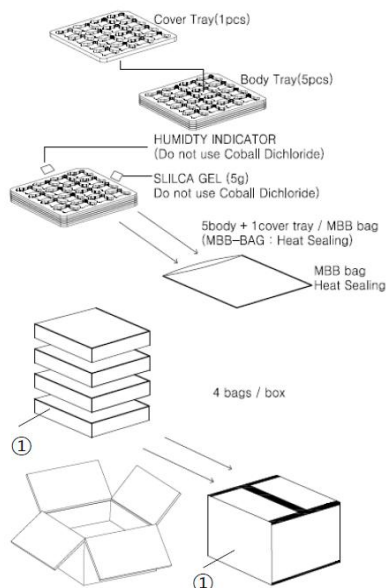


■ Middle Box



[MBB BAG drawing]



① Side Label

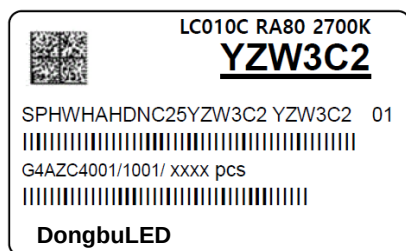

(1P) Supplier Part Number : SPHWAHDNC25YZW3C2



(33P) Bin Code / YZW3C2



(1T) Lot Number / 1001



(Q) Quantity : XXXX



(100) Data Code : 2109




(4L) Country of Origin : CN




3) Tray

- Model : LC010C

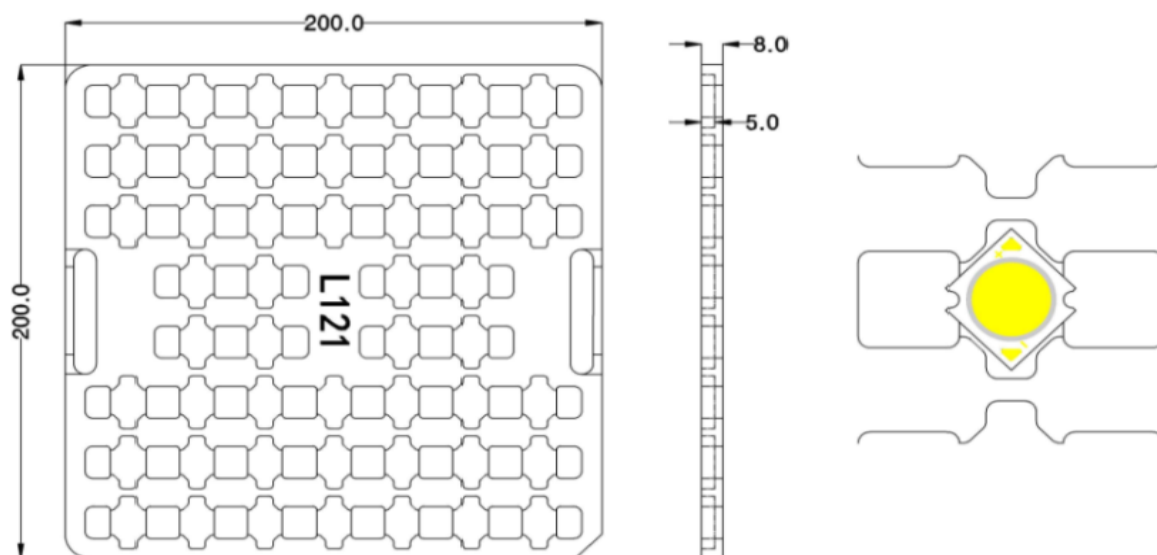

- Model : LC020C / LC030C / LC040C

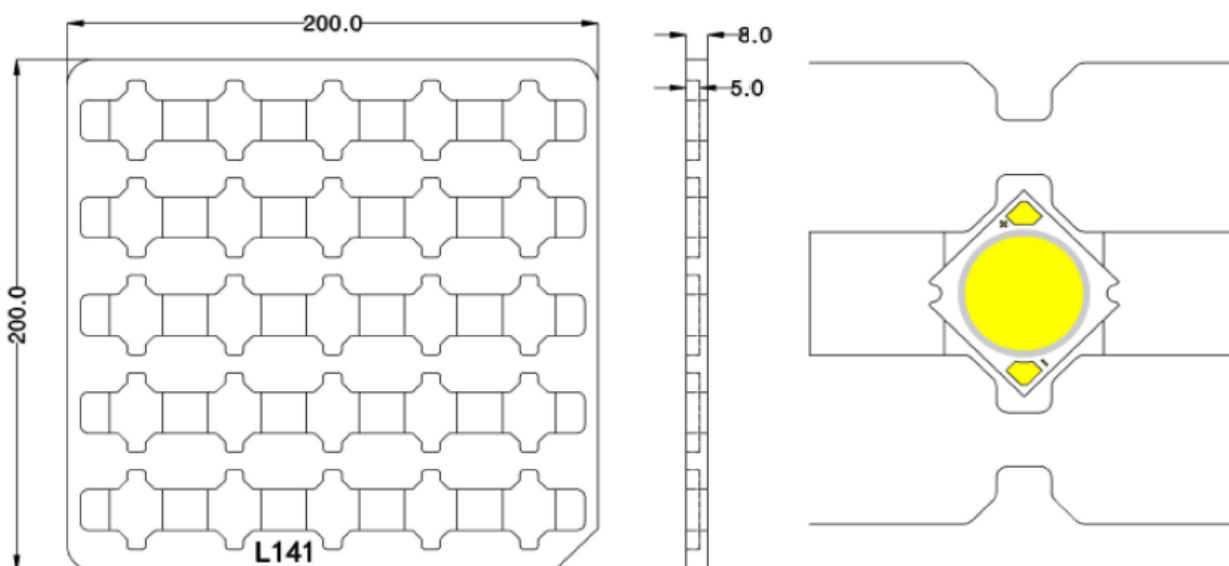

7. Precautions in Handling & Use

- 1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. Some solvent based cleaning agent may damage the silicone resins used in the device.
- 2) LEDs must be stored in a clean environment. Shelf life of sealed bags is 12 months at temperature 0~40 ° C, 0~90 % RH.
- 3) After storage bag is opened, device subjected to soldering (wiring) wiring), or other high temperature processes must
 - a. Mounted within 672 hours (28 days) at an assembly line with a condition of no more than 30 ° C / 60 % RH, or
 - b. Stored at <10 % RH
- 4) Repack unused products with anti moisture packing, fold to close any opening and then store in a dry place.
- 5) Devices require baking before mounting, if humidity card reading is >60 % at 23 ± 5 ° C.
- 6) Devices must be baked for 1 hour at 60 ± 5 ° C, if baking is required.
- 7) The LEDs are sensitive to the static electricity and surge current. It is recommended to use a wrist band or anti electrostatic glove when handling the LEDs. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn on voltage, or abnormal lighting of LEDs at low current.
- 8) The thermal management is one of the most critical factors for the LED lighting system. Especially the LED junction temperature should not exceed the absolute maximum rating while operation of LED lighting system.
For more information, please refer to Application Note Mechanical & Thermal Guide for COB.
- 9) In case of driving LEDs around the minimum current level (I_{f_min}), chips might exhibit different brightness due to the variation in I V characteristic s of each one. This is normal and does not adversely affect the performance of product.
- 10) VOCs (Volatile Organic Compounds) can be generated from adhesives, flux, hardener or organic additives used in luminaires (fixtures). Transparent LED silicone encapsulant is permeable to those chemicals and they may lead to a discoloration of encapsulant when they exposed to heat or light. This phenomenon can cause a significant loss of light emitted (output) from the luminaires. In order to prevent these problems, we recommend users to know the physical properties of materials used in luminaires and they must be carefully selected.
- 11) The resin area is very sensitive, please do not handle, press, touch, rub, clean, or pick by with tweezers on it. Instead, please pick at the handling area as indicated below.

